

MVE 3100/075

Leistungsdaten


- 8-poliger Motor, Nenndrehzahl: 750 U/min
- Standard: 400V / 50 Hz, 3-Phasen
- Anlauf in jeder Position möglich



Typ	Arbeitsmoment	Unwuchtkraft	Leistung	max. Strom	Gewicht
	[kgcm]	[kN]	[kW]	[A]	[kg]
MVE 3100/075	680,34	21,0	2,00	3,79	212

Tabelle 1: Leistungsdaten (bei 400V / 50 Hz)

Abmessungen

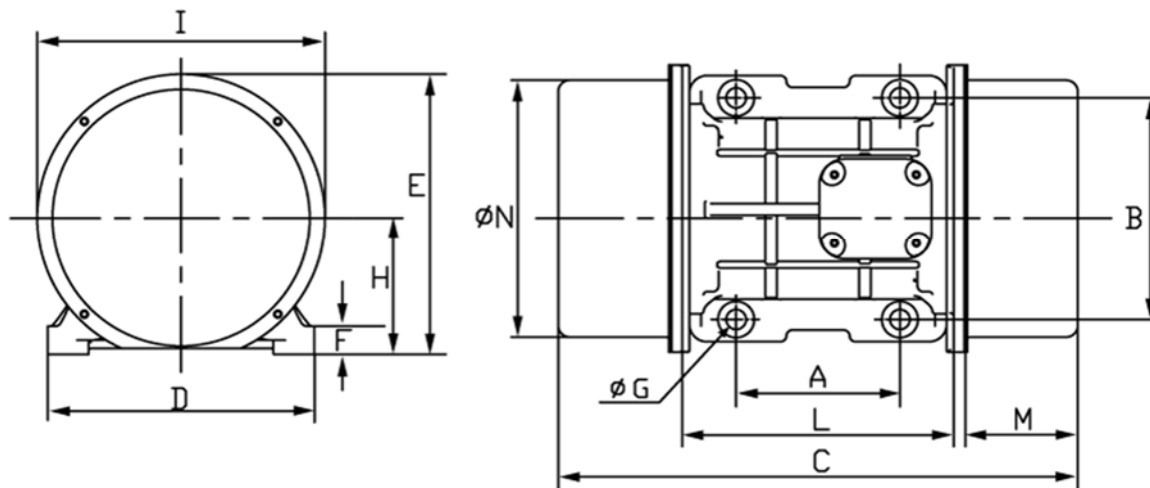

Maß	A	B	C	D	E	F	G	H	I	L	M	N	Schrauben
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
MVE 3100/075	180	280	683	332	360	37	26	167	345	304	170	310	M24

Tabelle 2: Abmessungen