

MVE 6500/3

Leistungsdaten


- 2-poliger Motor, Nenndrehzahl: 3000 U/min
- Standard: 400V / 50 Hz, 3-Phasen
- Anlauf in jeder Position möglich



Typ	Arbeitsmoment	Unwuchtkraft	Leistung	max. Strom	Gewicht
	[kgcm]	[kN]	[kW]	[A]	[kg]
MVE 6500/3	129,55	64	5,5	9,50	228

Tabelle 1: Leistungsdaten (bei 400V / 50 Hz)

Abmessungen

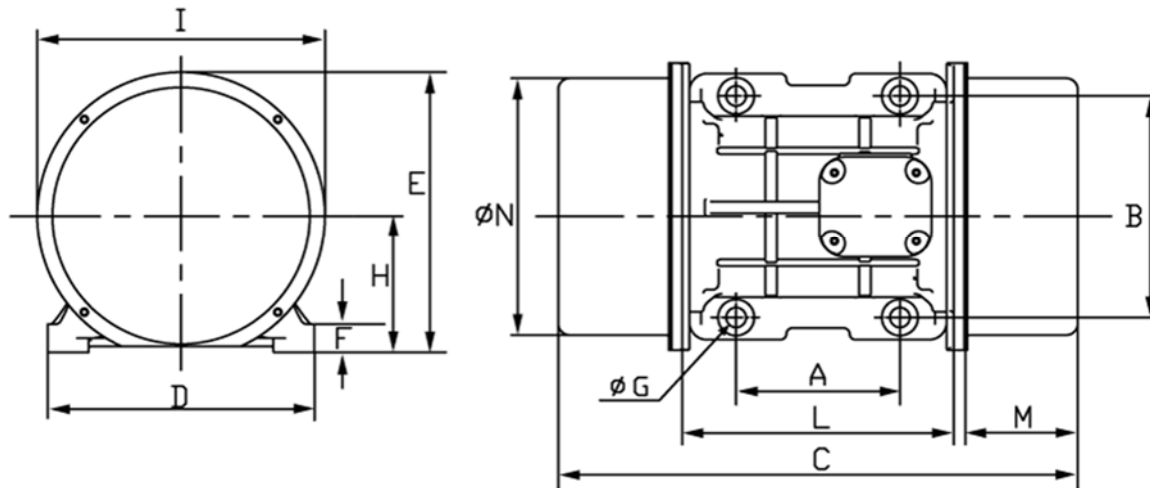

Maß	A	B	C	D	E	F	G	H	I	L	M	N	Schrauben
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
MVE 6500/3	200	320	605	385	410	49	28	199	421	325	120	378	M27

Tabelle 2: Abmessungen