

# K22

## Performance data


- Operating temperatures -20°C bis 130°C
- Start-up possible in any position
- Maintenance-free, oil-free operation possible (lubrication increases service life)
- Vibration frequency and force are adjusted via the operating pressure
- ATEX Zone 21 II 2D c T95°C/135°C  
Zone 1 II 2G c T5/T4
- Noise level below 80 dB(A)



Typ	Vibration frequency [1/min]			Force [N]			Working torque [kg*cm]			Air consumption [l/min]		
	2 bar	4 bar	6 bar	2 bar	4 bar	6 bar	2 bar	4 bar	6 bar	2 bar	4 bar	6 bar
K22	2.850	3.450	4.050	88	139	192	0,20	0,21	0,21	32	50	73

Table 1: Performance data

## Dimensions

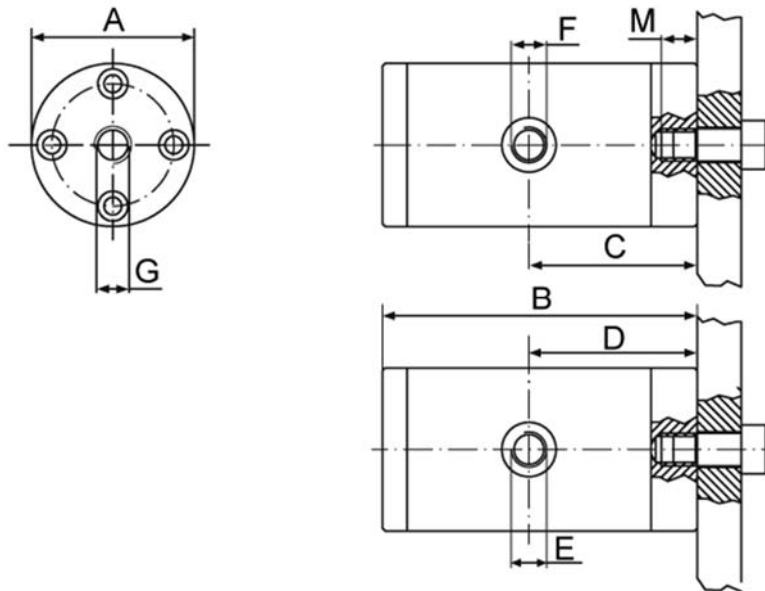

Typ	A	B	C	D	E	F	G	H	L	M	Weight
	[mm]	[mm]	[mm]	[mm]				[mm]	[mm]	[mm]	[kg]
K22	45	105	56	56	1/8"	1/8"	M10			13	0,50

Table 2: Dimensions