

MVE 40/15

Leistungsdaten


- 4-poliger Motor, Nenndrehzahl: 1500 U/min
- Standard: 400V / 50 Hz, 3-Phasen
- Anlauf in jeder Position möglich



Typ	Arbeitsmoment	Unwuchtkraft	Leistung	max. Strom	Gewicht
	[kgcm]	[kN]	[kW]	[A]	[kg]
MVE 40/15	1,97	0,25	0,04	0,31	4,6

Tabelle 1: Leistungsdaten (bei 400V / 50 Hz)

Abmessungen

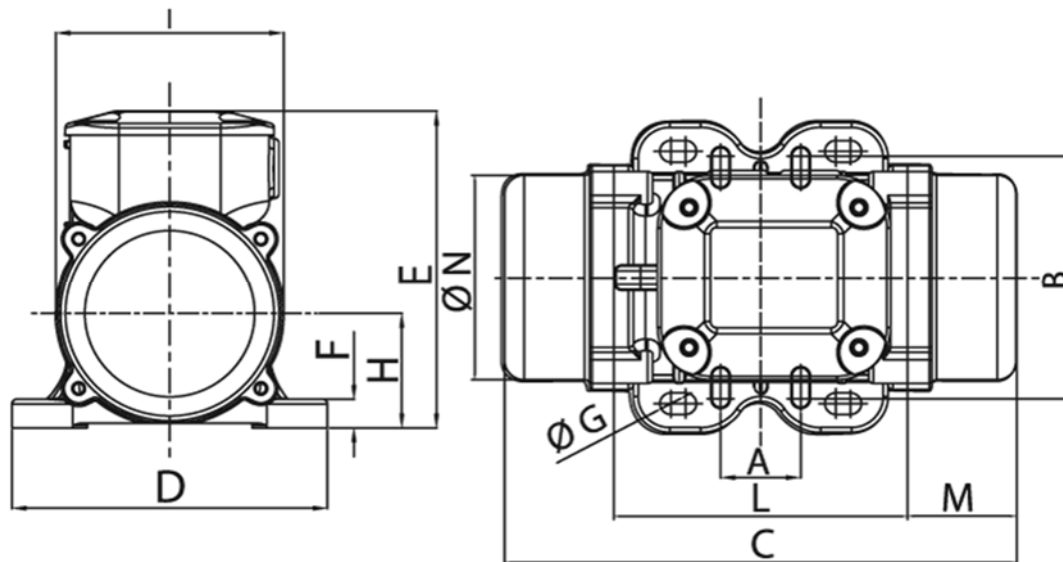

Maß	A	B	C	D	E	F	G	H	I	L	M	N	Schrauben
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
MVE 40/15	62-74	106	211	130	136	12	9	48	94	121	45	85	M8
	33	83-102					7						M6

Tabelle 2: Abmessungen