

# ERDC-100-12

## Leistungsdaten


- Motor Nenndrehzahl: 3000 U/min
- Gleichstromanschluss
- Anlauf in jeder Position möglich



| Typ          | Arbeitsmoment<br>[kgcm] | Unwuchtkraft<br>[N] | Leistung<br>[W] | max. Strom<br>[A] | Spannung<br>[VDC] | Gewicht<br>[kg] |
|--------------|-------------------------|---------------------|-----------------|-------------------|-------------------|-----------------|
| ER-DC-100-12 | 2,4                     | 1190                | 100             | 8,0               | 12                | 5,0             |

Tabelle 1: Leistungsdaten

## Abmessungen

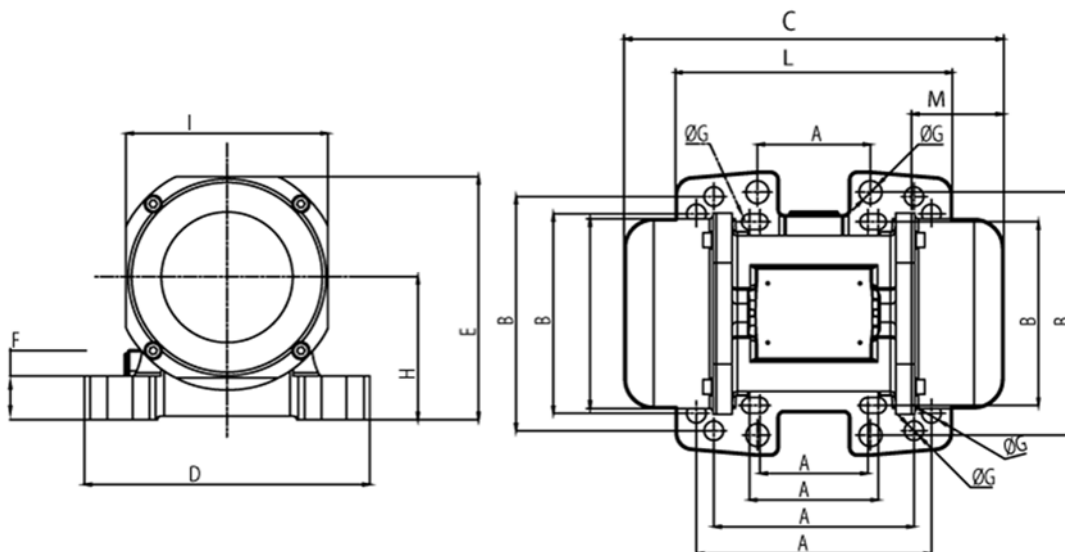

| Maß          | A     | B    | C    | D    | E    | F    | G    | H    | I    | L    | M    | N    | Schraube |
|--------------|-------|------|------|------|------|------|------|------|------|------|------|------|----------|
|              | [mm]  | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] |          |
| ER-DC-100-12 | 62-74 | 106  | 218  | 164  | 140  | 25   | 9    | 82   | 116  | 159  | 53   | 110  | M8       |
|              | 65    | 140  |      |      |      |      | 13   |      |      |      |      |      | M12      |
|              | 115   | 135  |      |      |      |      | 11   |      |      |      |      |      | M10      |
|              | 135   | 115  |      |      |      |      | 11   |      |      |      |      |      | M10      |

Tabelle 2: Abmessungen