

ERDC-100-24

Performance data


- Motor rated speed: 3000 rpm
- DC power connector
- Start-up possible in any position



| Type | Working moment [kgcm] | Unbalance force [N] | Performance [W] | Max. current [A] | Voltage [VDC] | Weight [kg] |
|-------------|--------------------------|------------------------|--------------------|---------------------|------------------|----------------|
| ERDC-100-24 | 2,4 | 1190 | 100 | 4,0 | 12 | 5,0 |

Table 1: Performance data

Dimensions

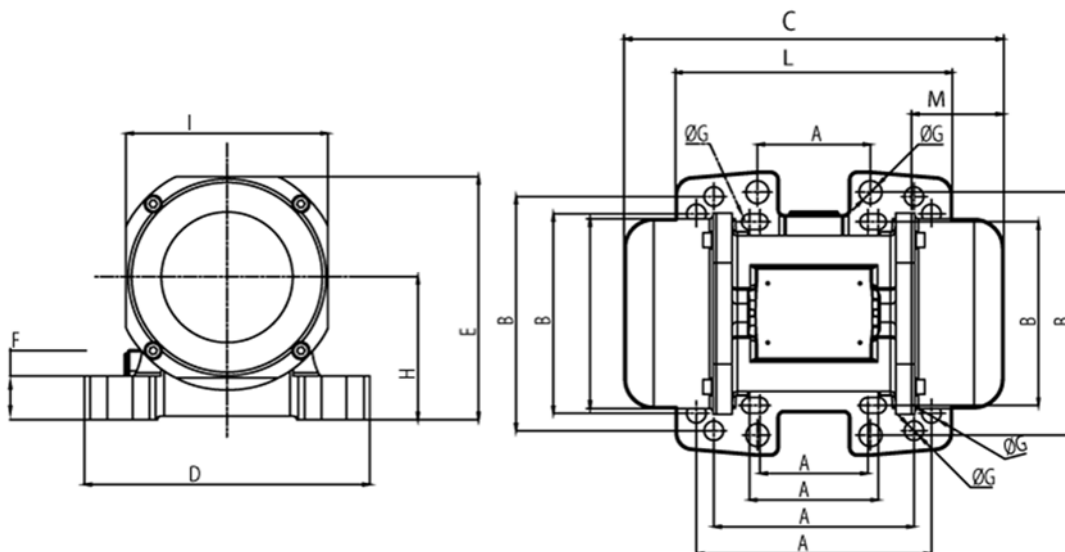

| Dimension | A | B | C | D | E | F | G | H | I | L | M | N | Screw |
|-------------|-------|------|------|------|------|------|------|------|------|------|------|------|-------|
| | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | |
| ERDC-100-24 | 62-74 | 106 | 218 | 164 | 140 | 25 | 9 | 82 | 116 | 159 | 53 | 110 | M8 |
| | 65 | 140 | | | | | 13 | | | | | | M12 |
| | 115 | 135 | | | | | 11 | | | | | | M10 |
| | 135 | 115 | | | | | 11 | | | | | | M10 |

Table 2: Dimensions