

MVE 1310/3

Performance data


- 2-pole motor, rated speed: 3000 rpm
- Standard: 400V / 50 Hz, 3-phase
- ATEX II 2D Ex tb IIIC Tx Db IP66
- Start-up possible in any position



| Type | Working moment | Unbalance force | Performance | Max. current | Weight |
|------------|----------------|-----------------|-------------|--------------|--------|
| | [kgcm] | [kN] | [kW] | [A] | [kg] |
| MVE 1310/3 | 22,34 | 11,0 | 1,30 | 2,44 | 30,00 |

Table 1: Performance data (at 400V / 50 Hz)

Dimensions

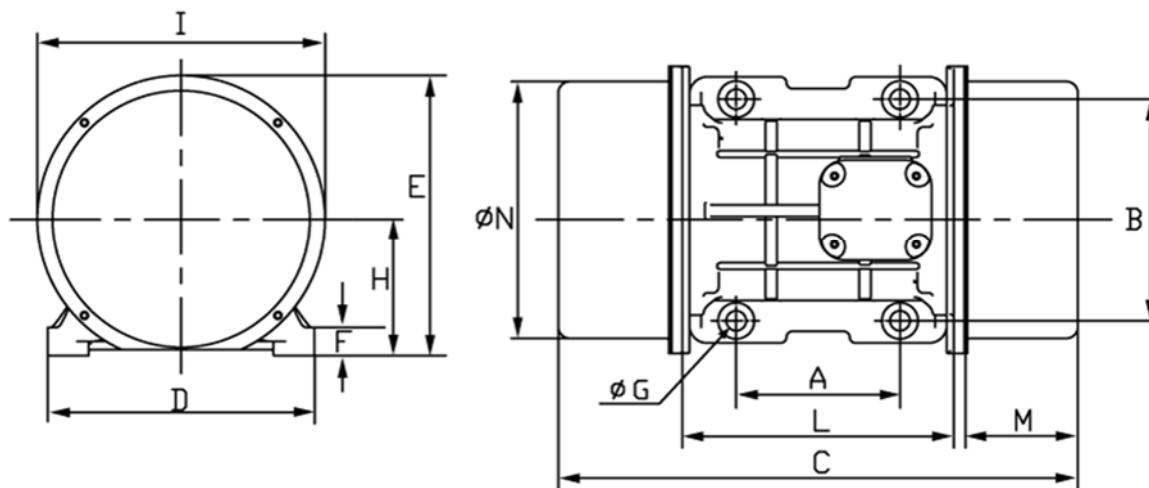

| Dimension | A | B | C | D | E | F | G | H | I | L | M | N | Screw |
|------------|------|------|------|------|------|------|------|------|------|------|------|------|-------|
| | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | |
| MVE 1310/3 | 100 | 200 | 321 | 208 | 210 | 22 | 17 | 94 | 180 | 205 | 58 | 170 | M16 |

Table 2: Dimensions