

# MVE 2500/15

## Performance data


- 4-pole motor, rated speed: 1500 rpm
- Standard: 400V / 50 Hz, 3-phase
- ATEX II 2D Ex tb IIIC Tx Db IP66
- Start-up possible in any position



Type	Working moment	Unbalance force	Performance	Max. current	Weight
	[kgcm]	[kN]	[kW]	[A]	[kg]
MVE 2500/15	204	25,1	1,80	3,40	90,0

Table 1: Performance data (at 400V / 50 Hz)

## Dimensions

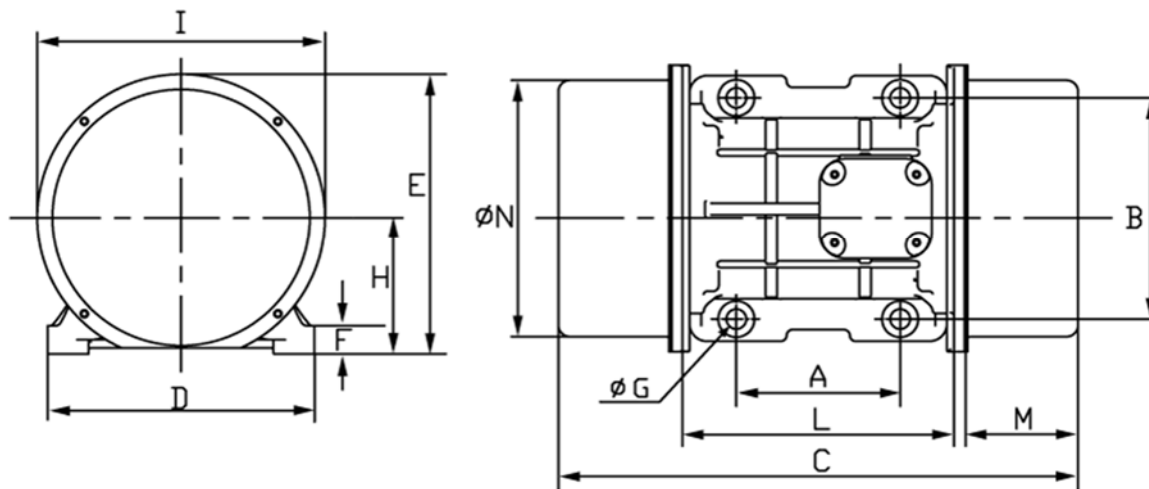

Dimension	A	B	C	D	E	F	G	H	I	L	M	N	Screw
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
MVE 2500/15	155	225	522	272	284	40	22	140	267	250	123	235	M20

Table 2: Dimensions