

# MVE 2600/1

## Performance data


- 6-pole motor, rated speed: 1000 rpm
- Standard: 400V / 50 Hz, 3-phase
- ATEX II 2D Ex tb IIIC Tx Db IP66
- Start-up possible in any position



Type	Working moment	Unbalance force	Performance	Max. current	Weight
	[kgcm]	[kN]	[kW]	[A]	[kg]
MVE 2600/1	467,44	25,6	1,96	3,63	148,60

Table 1: Performance data (at 400V / 50 Hz)

## Dimensions

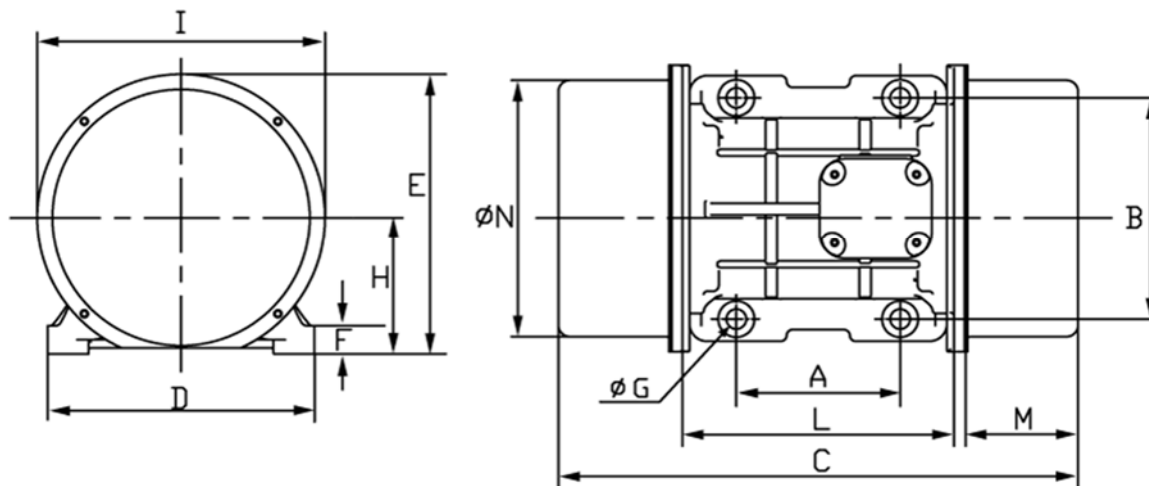

Dimension	A	B	C	D	E	F	G	H	I	L	M	N	Screw
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
MVE 2600/1	155	255	708	302	318	35	23,5	147	295	273	200	264	M22

Table 2: Dimensions