

MVE 3000/15

Performance data


- 4-pole motor, rated speed: 1500 rpm
- Standard: 400V / 50 Hz, 3-phase
- ATEX II 2D Ex tb IIIC Tx Db IP66
- Start-up possible in any position



Type	Working moment	Unbalance force	Performance	Max. current	Weight
	[kgcm]	[kN]	[kW]	[A]	[kg]
MVE 3000/15	249	30,6	1,90	3,70	97,5

Table 1: Performance data (at 400V / 50 Hz)

Dimensions

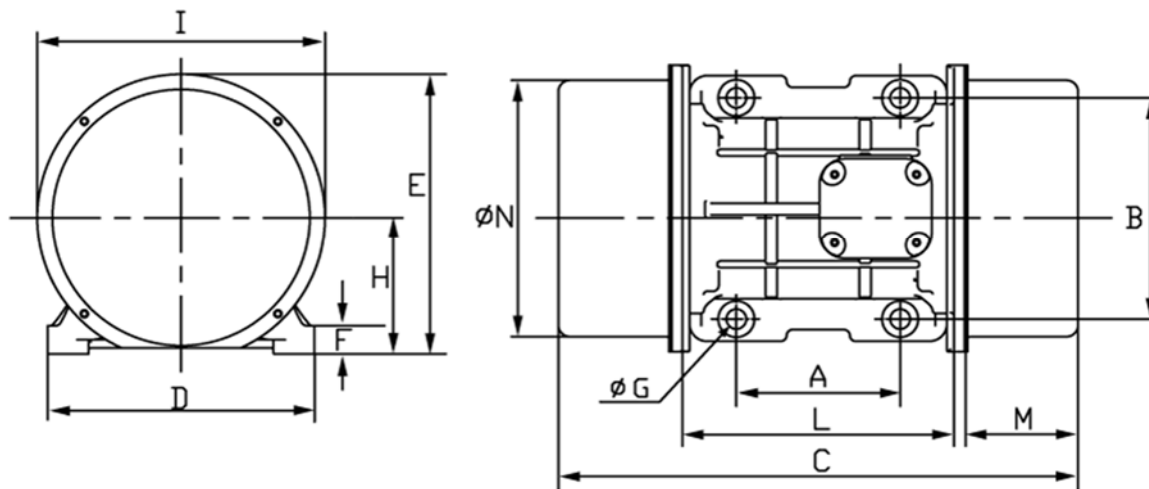

Dimension	A	B	C	D	E	F	G	H	I	L	M	N	Screw
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
MVE 3000/15	155	225	556	272	284	40	22	140	267	250	123	235	M20

Table 2: Dimensions