

# MVE 4000/3

## Performance data


- 2-pole motor, rated speed: 3000 rpm
- Standard: 400V / 50 Hz, 3-phase
- ATEX II 2D Ex tb IIIC Tx Db IP66
- Start-up possible in any position



Type	Working moment	Unbalance force	Performance	Max. current	Weight
	[kgcm]	[kN]	[kW]	[A]	[kg]
MVE 4000/3	79,4	39,6	2,90	5,30	107,0

Table 1: Performance data (at 400V / 50 Hz)

## Dimensions

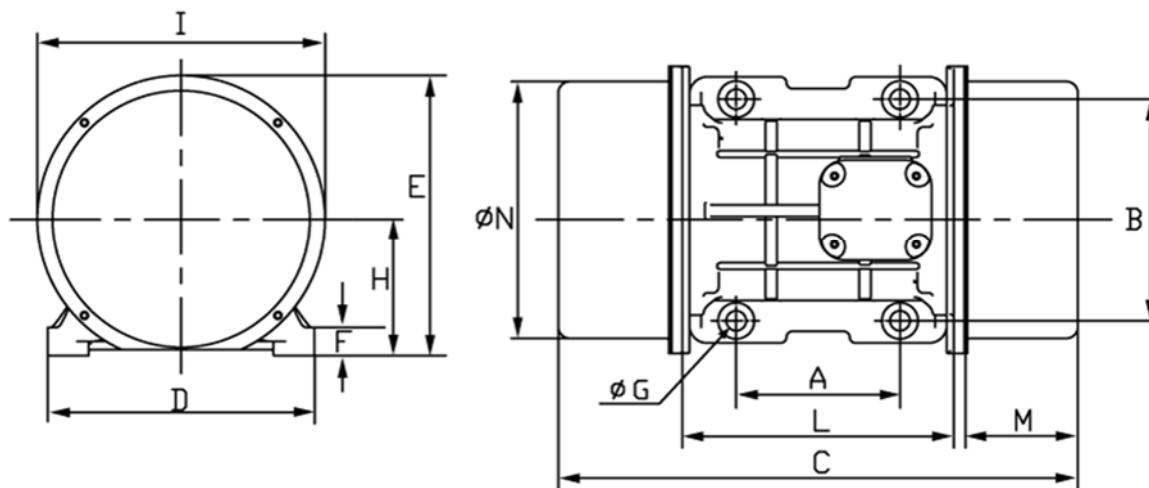

Dimension	A	B	C	D	E	F	G	H	I	L	M	N	Screw
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
MVE 4000/3	155	255	538	302	318	35	25	147	295	273	115	264	M24

Table 2: Dimensions