

# MVE 4300/15

## Performance data


- 4-pole motor, rated speed: 1500 rpm
- Standard: 400V / 50 Hz, 3-phase
- ATEX II 2D Ex tb IIIC Tx Db IP66
- Start-up possible in any position



| Type        | Working moment | Unbalance force | Performance | Max. current | Weight |
|-------------|----------------|-----------------|-------------|--------------|--------|
|             | [kgcm]         | [kN]            | [kW]        | [A]          | [kg]   |
| MVE 4300/15 | 343            | 42,3            | 2,5         | 5,70         | 134    |

Table 1: Performance data (at 400V / 50 Hz)

## Dimensions

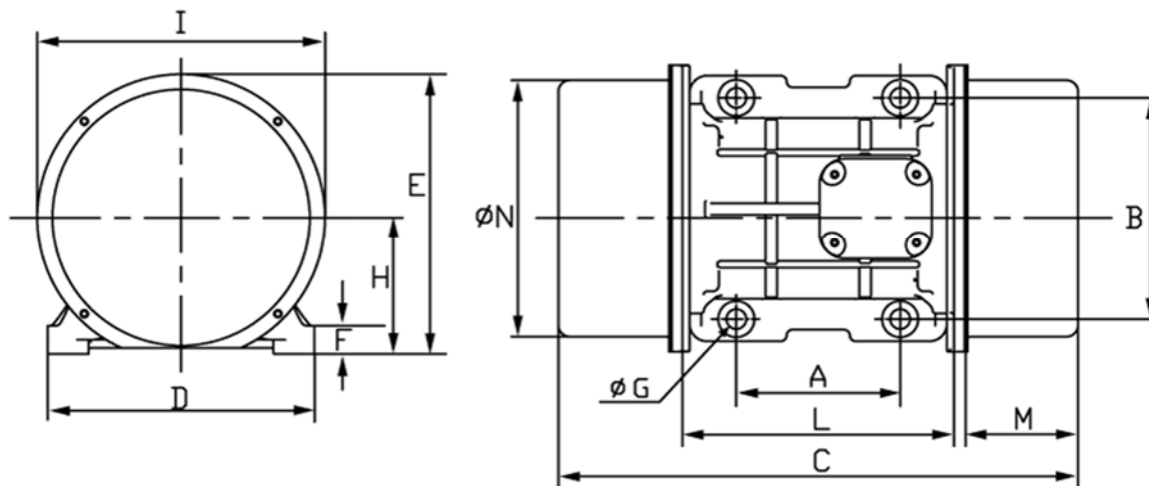

| Dimension   | A    | B    | C    | D    | E    | F    | G    | H    | I    | L    | M    | N    | Screw |
|-------------|------|------|------|------|------|------|------|------|------|------|------|------|-------|
|             | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] |       |
| MVE 4300/15 | 155  | 255  | 588  | 302  | 318  | 35   | 23,5 | 147  | 295  | 273  | 140  | 264  | M22   |

Table 2: Dimensions