

# MVE 500/15

## Performance data


- 4-pole motor, rated speed: 1500 rpm
- Standard: 400V / 50 Hz, 3-phase
- ATEX II 2D Ex tb IIIC Tx Db IP66
- Start-up possible in any position



| Type       | Working moment | Unbalance force | Performance | Max. current | Weight |
|------------|----------------|-----------------|-------------|--------------|--------|
|            | [kgcm]         | [kN]            | [kW]        | [A]          | [kg]   |
| MVE 500/15 | 44,6           | 4,94            | 0,35        | 1,06         | 21,0   |

Table 1: Performance data (at 400V / 50 Hz)

## Dimensions

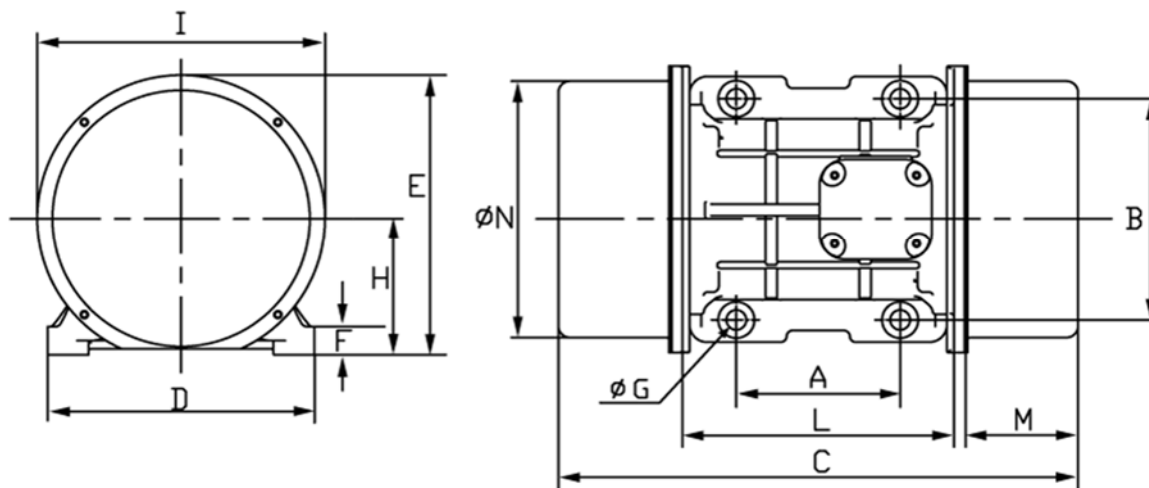

| Dimension | A    | B    | C    | D    | E    | F    | G    | H    | I    | L    | M    | N    | Screw |
|-----------|------|------|------|------|------|------|------|------|------|------|------|------|-------|
|           | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] |       |
| 500/15    | 105  | 140  | 334  | 168  | 196  | 22   | 13   | 92   | 169  | 178  | 75   | 158  | M12   |

Table 2: Dimensions