

MVE 60/3

Performance data


- 2-pole motor, rated speed: 3000 rpm
- Standard: 400V / 50 Hz, 3-phase
- Special version 1 phase 230V / 50 Hz with capacitor available
- ATEX II 2D Ex tb IIIC Tx Db IP66
- Start-up possible in any position



Type	Working moment [kgcm]	Unbalance force [kN]	Performance [kW]	Max. current [A]	Weight [kg]
MVE 60/3	1,31	0,67	0,08	0,16	4,20

Table 1: Performance data (at 400V / 50 Hz)

Dimensions

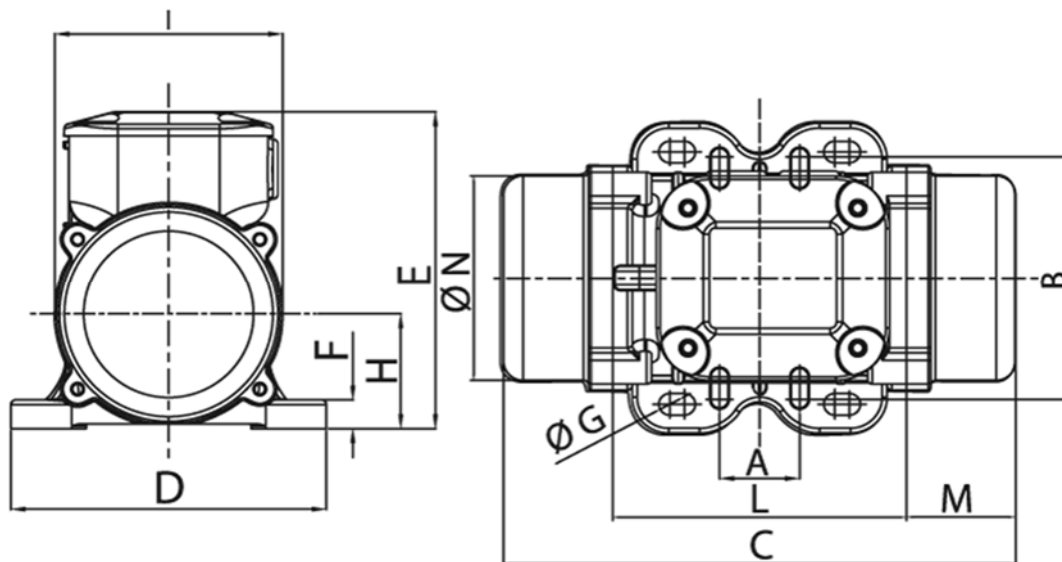

Type	A	B	C	D	E	F	G	H	I	L	M	N	Screw
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
MVE 60/3	62-74	106	211	130	136	12	9	48	94	121	45	85	M8
	33	83-102					7						M6

Table 2: Dimensions