

MVE 700/15

Performance data


- 4-pole motor, rated speed: 1500 rpm
- Standard: 400V / 50 Hz, 3-phase
- ATEX II 2D Ex tb IIIC Tx Db IP66
- Start-up possible in any position



| Type | Working moment | Unbalance force | Performance | Max. current | Weight |
|------------|----------------|-----------------|-------------|--------------|--------|
| | [kgcm] | [kN] | [kW] | [A] | [kg] |
| MVE 700/15 | 57 | 7,00 | 0,62 | 1,32 | 27,4 |

Table 1: Performance data (at 400V / 50 Hz)

Dimensions

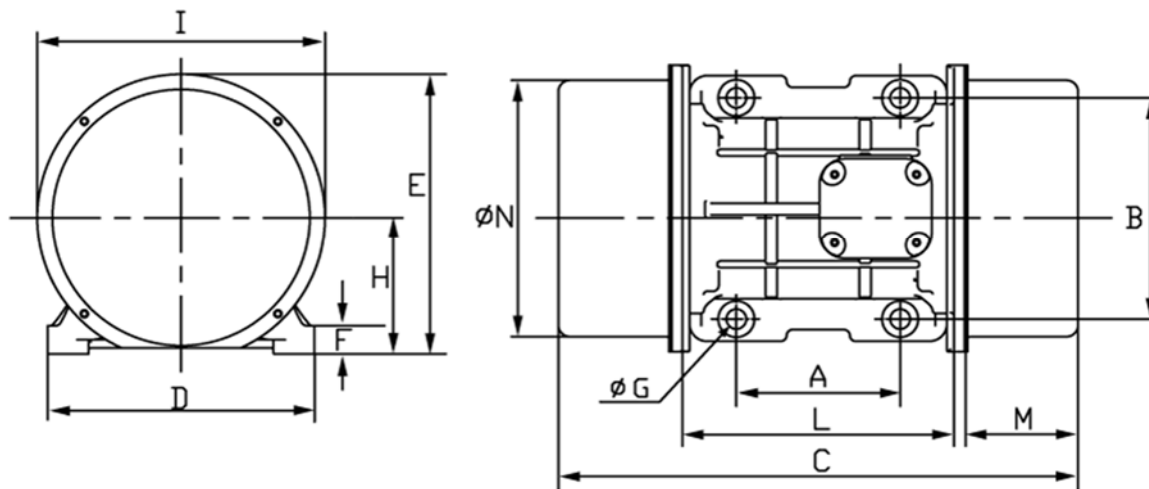

| Dimension | A | B | C | D | E | F | G | H | I | L | M | N | Screw |
|-----------|------|------|------|------|------|------|------|------|------|------|------|------|-------|
| | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | |
| 700/15 | 120 | 170 | 397 | 208 | 210 | 22 | 17 | 94 | 180 | 205 | 90 | 170 | M16 |

Table 2: Dimensions