

MVE 800/36

Performance data


- 2-pole motor, rated speed: 3600 rpm
- Standard: 230/460V / 60 Hz, 3-Phasen
- ATEX II 2D Ex tb IIIC Tx Db IP66
- Start-up possible in any position



Type	Working moment	Unbalance force	Performance	Max. current	Weight
	[kgcm]	[kN]	[kW]	[A]	[kg]
MVE 800/36	11,06	7,85	0,9	1,50	20,60

Table 1: Performance data (at 460V / 60 Hz)

Dimensions

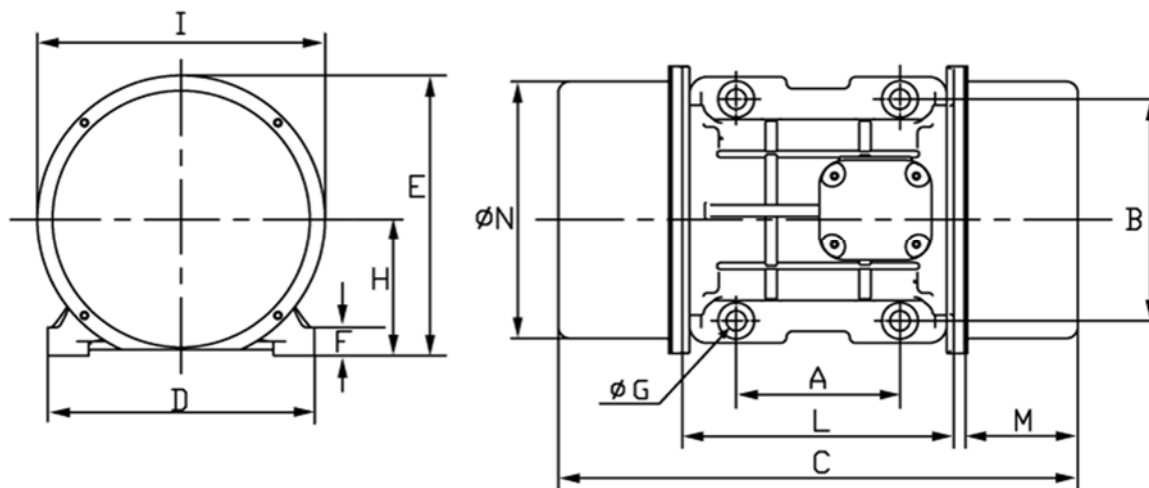

Dimension	A	B	C	D	E	F	G	H	I	L	M	N	Screw
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
MVE 800/36	120	170	321	208	210	22	17	94	180	205	58	170	M16

Table 2: Dimensions