

Micro 3-3M

Performance data


- 2-pole motor, rated speed: 3000 rpm
- Voltage 230V / 50 Hz, 1-Phase
- ATEX II 2D Ex tb IIIC Tx Db IP66
- Start-up possible in any position



Type	Working moment	Unbalance force	Performance	Max. current	Weight
	[kgcm]	[N]	[kW]	[A]	[kg]
Micro 3/3M	0,08	40	0,03	0,3	1,6

Table 1: Performance data (at 230V / 50 Hz)

Dimensions

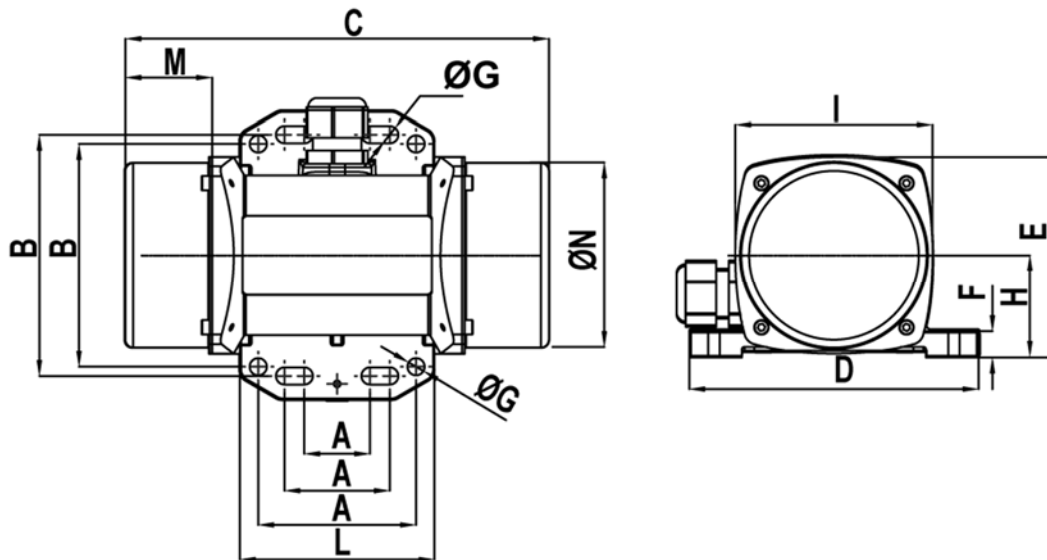

Dimension	A	B	C	D	E	F	G	H	I	L	M	N
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
Micro 3/3M	25-40	92	145	110	76,5	10	6,5	39	75	74	25	70,5
	60	85					6,5					

Table 2: Dimensions