

Micro 41-36

Performance data


- 2-pole motor, rated speed: 3600 rpm
- Voltage 460V / 60 Hz, 3-Phase
- ATEX II 2D Ex tb IIIC Tx Db IP66
- Start-up possible in any position



Type	Working moment	Unbalance force	Performance	Max. current	Weight
	[kgcm]	[N]	[kW]	[A]	[kg]
Micro 41/36	0,90	638	0,06	0,18	2,4

Table 1: Performance data (at 460V / 60 Hz)

Dimensions

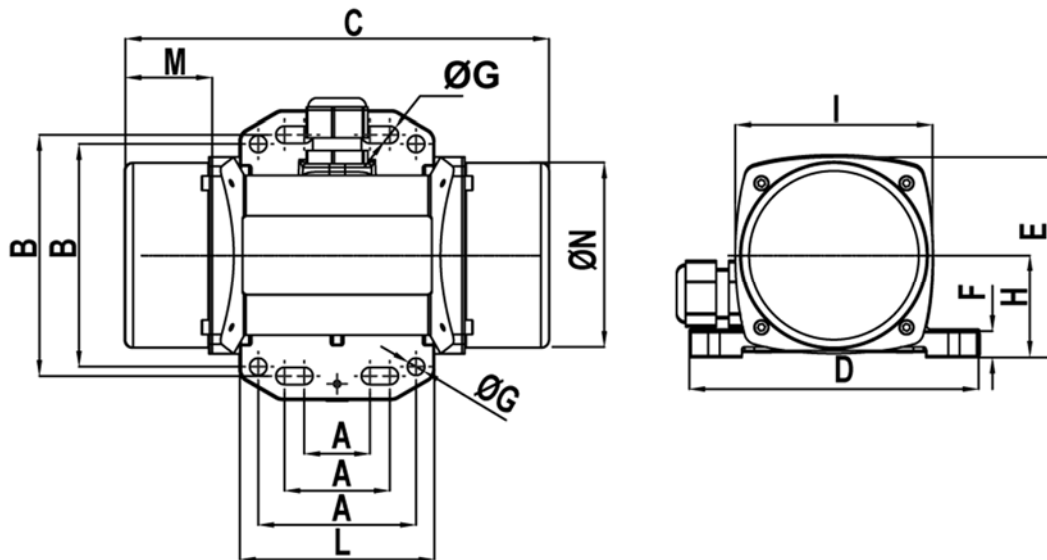

Dimension	A	B	C	D	E	F	G	H	I	L	M	N
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
Micro 41/36	25-40	92	161	110	76,5	10	6,5	39	75	74	37	70,5
	60	85										

Table 2: Dimensions