


# AM-2

## Description

- Used to fluidize bulk material
- For bins with warped walls
- Mounted inside the bin
- Air connector G 3/4", operating pressure up to 2,0 bar
- Highly porous sinter-material (1.4404) that lets air evaporate evenly into the surrounding bulk material
- Connector made of stainless steel (1.4301)
- Temperature up to 300°C
- Special versions available on request (e.g. acid or chlorine resistant)



## Dimensions

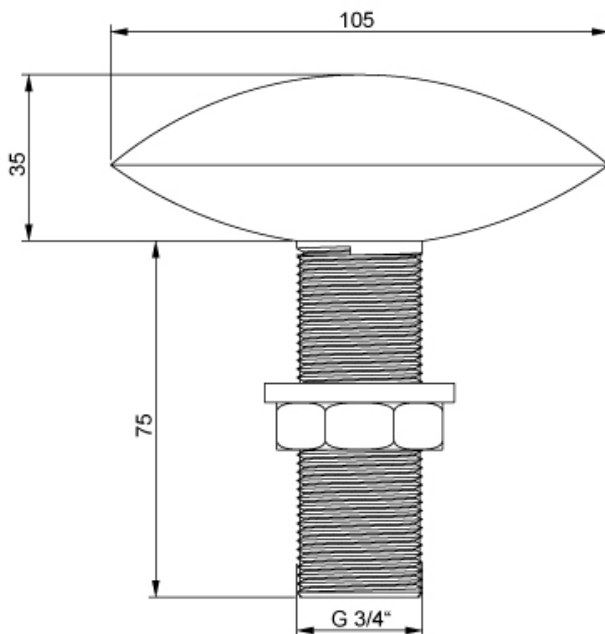

Belüftungspot AM-2

