

# ERDC-100-12

## Performance data


- Motor rated speed: 3000 rpm
- DC power connector
- Start-up possible in any position



Type	Working moment [kgcm]	Unbalance force [N]	Performance [W]	Max. current [A]	Voltage [VDC]	Weight [kg]
ER-DC-100-12	2,4	1190	100	8,0	12	5,0

Table 1: Performance data

## Dimensions

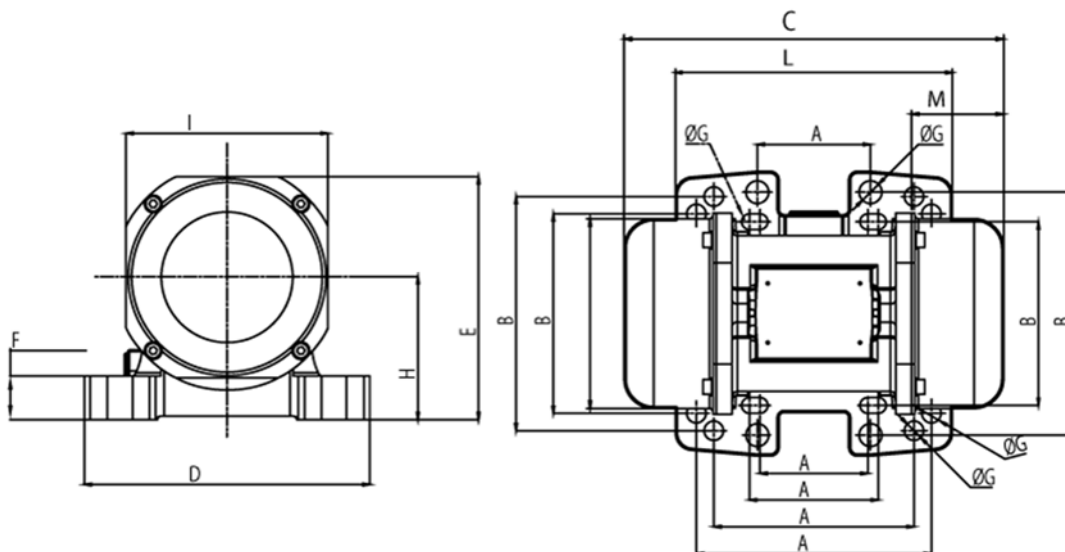

Dimension	A	B	C	D	E	F	G	H	I	L	M	N	Screw
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	
ER-DC-100-12	62-74	106	218	164	140	25	9	82	116	159	53	110	M8
	65	140					13						M12
	115	135					11						M10
	135	115					11						M10

Table 2: Dimensions